



**Pumps2go** Ltd, Units 5-6 Grain Warehouse, Derby Street, Burton-on-trent, DE14 2JJ



+44 (0)1283 512513




info@pumps2go.co.uk



www.pumps2go.co.uk

## About Us

**Pumps2Go** has worked with our exclusive distribution partners Siccom and Wipcool in Developing a comprehensive and cost effective range of condensate pumps suitable for most applications in the HVAC market.

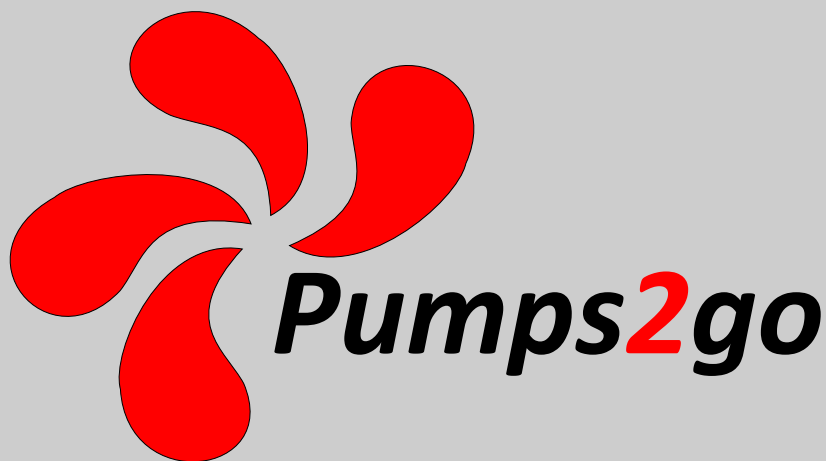

## Contents

Mini Flowatch 2	1
Mini Flowatch Comfort	2
Maxi Eco Flowatch	3
Flowatch DT20 Silence	4
Flowatch Design	5
Flowatch DT20 Design	6
Flowatch Vision	7
Centifugal Pump CP08	8
Flowta Evo	9
Eco Tank+ 1.2/2.5	10
Sunny Flowatch Duo	11
1.8L Tank Pump	12
1.8L High Lift Tank Pump	13
Dairy Cabinet Pump	14
Braided Hose	15
Trunking	16-17

# Mini Flowatch 2

Mini solenoid pump, reliable and silent for the condensate removal of air conditioners up to 10kW/36000BTU

Ref: DE05LC440



## Technical Specification

Flowrate Max	15L/hr
Suction Head Max	2m
Discharge Head	10m
Electrical Power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise Level	
Protection Rating	IP64
Thermal Protection	Yes
Operating Cycle	100%
Power/Alarm Cable	1.6m
Dimensions	86x28x48mm / 75x36x38mm

## Benefits



### Very Silent

Very silent pump (20.2 dBA), suitable for an installation in any room.



### IP64 Protection

Protected against water splashes dust.



### Quick Connectors

Make installation and maintenance easier.



### Clear Reservoir

Facilitates maintenance thanks to a quick visualization of the reservoir state.



### Brass Outlet

More solid and reliable than plastic.




### Accessories Included

All accessories required for installation



## Contents

Pump - Reservoir with air-vent tube -  
Power / alarm cable - Reservoir stand -  
Double-side adhesive - Inlet tube -  
Suction tube 1.8m - 1 clamp

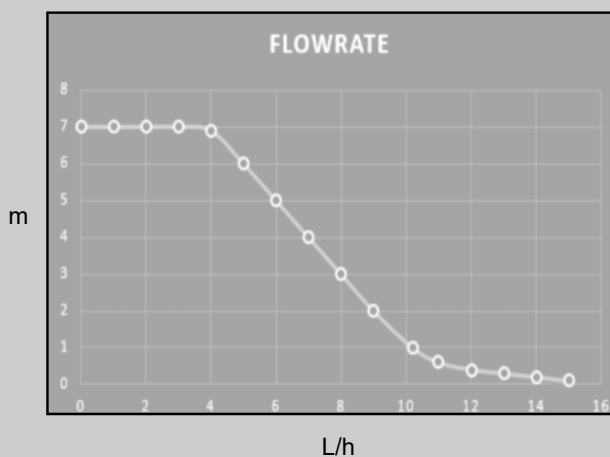

## Mini Flowatch 2 Comfort


The best mini pump on the market in a quieter and easy-to-install version, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCD750



### Technical Specification

Flowrate Max	15L/hr
Suction Head Max	2m
Discharge Head	10m
Electrical Power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise Level	
Protection Rating	IP64
Thermal Protection	Yes
Operating Cycle	100%
Power/Alarm Cable	1.6m
Dimensions	86x28x48mm / 75x36x38mm

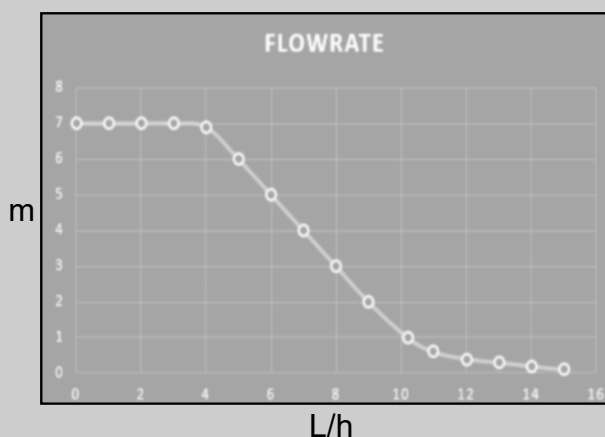

### Benefits

#### New Casing



The new Comfort casing is composed of a custom made patented foam.

It dampens pump vibrations and reduces the perceived noise level.

#### Reliability



The mini FLOWATCH® 2, included, is a reliable and durable pump sold in more than 45 countries.




#### Very

Thanks to its casing, the pump is extremely quiet and suitable for installation in any room.



#### Pump Stand Included

Makes pump installation and maintenance easier.



#### Stop Siphoning Included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



#### Quick Connectors

Makes installation and maintenance easier.



#### IP64 Protection

Protected against water splashes and dust.

### Contents




Pump - Reservoir with air-vent tube - Power / alarm cable  
 - Comfort casing - Pump stand - Reservoir stand - Stop Siphoning - Double-sided adhesive - Inlet tube -

# Maxi Eco Flowatch

Maxi solenoid pump, compact and powerful for the condensate removal of air conditioners up to 30kW/100000BTU.

Ref: DE04LCC300

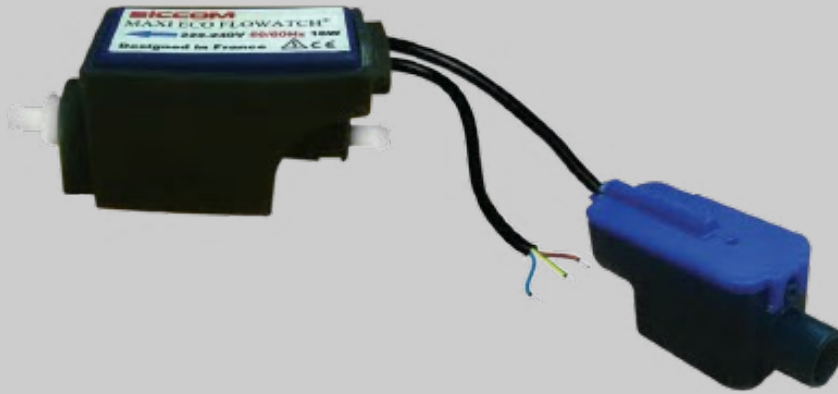

## Technical Specifications

Flowrate Max	40 L/h
Suction Head Max	2m
Discharge Head	10m
Electrical Power	16 W
Voltage	220-240 V - 50/60 Hz
Alarm	No Alarm
Noise Level	
Protection Raiting	IP20
Thermal Protection	Yes
Operating Cycle	100%
Power Cable	1.5m
Dimensions	111 x 41 x 48mm / 90 x 32 x 42mm

## Benefits

### Silent

The only pump in the world to provide high flowrate while maintaining low noise levels.

### High Efficiency

Flowrate 40 l/h  
Discharge head 10m

### Removable Reservoir

Can be easily unclipped in order to clean the reservoir and the float.

### Integrated Filter

A plastic filter is integrated to the reservoir to prevent big impurities, protecting potential damage to the pump.

### Accessories Included

All necessary accessories are included in the box.



# Flowwatch Silence DT20


The perfect combination of silence, performance, reliability and simplicity. The new standard in condensate pumps.

Ref: DE20PMCD700



## Technical Specification

Flowrate Max	20L/hr
Suction Head Max	3m
Discharge Head	10m
Electrical Power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NO-NC
Noise Level	✖
Protection Rating	IP24
Operating Cycle	100%
Power/Alarm Cable	1.6m
Dimensions	168x37x40mm / 75x36x38mm

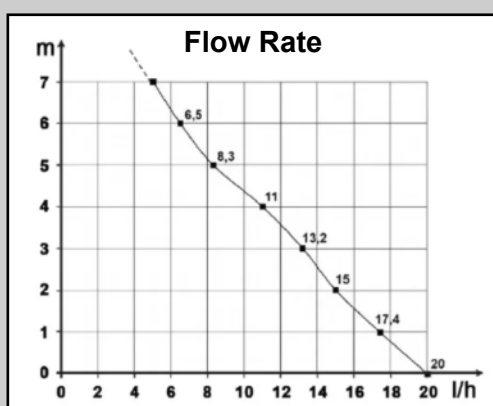

## Benefits

### Extreme Silence



An unrivalled user experience. No disturbance, even in the bedroom.

### New technology



Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!

### IP24 protection



Protected against water splashes.

### Plug & Play connectors



Make installation and maintenance easier and faster.

### Very low power consumption



Only 3W power consumption, during operation only!

### Mounting ring



The pump can be suspended with a clamp to facilitate its installation.

### Stop siphoning included



Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

## Contents

Pump – Reservoir with air-vent tube – Power / alarm cable – Stop Siphoning – Reservoir stand – Double-sided adhesives – Inlet tube – Suction tube 1.8 m – 3 clamps.


# Flowatch Design

Complete kit, in-duct pump for the condensate removal of air conditioners up to 10Kw/36000BTU.

Ref: DE05LCF300



## Technical Specification

Flowrate Max	15L/hr
Discharge Head	10m
Electrical Power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise Level	
Protection Rating	IP64
Thermal Protection	Yes
Operating Cycle	100%
Power/Alarm Cable	1.6m
Dimensions	800x80x55mm

## Benefits



### Mini Flowatch 2 included

It ensures high reliability and easy maintenance.




### Very Silent

Very silent pump (20.2 dBA), suitable for installations in any room.



### IP64 Protection

Protected against water splashes and dust.



### Stop Siphoning Included

This helps eliminate any risk of negative discharge and ensures the pump operates effectively over time.




### Nice Design

Thanks to its shape and its finishing Accessories (included), FLOWATCH® DESIGN offers great aesthetic qualities.



### Kit Pre-Assembled

Pump is already installed in its duct, Making Installation quick and easy.

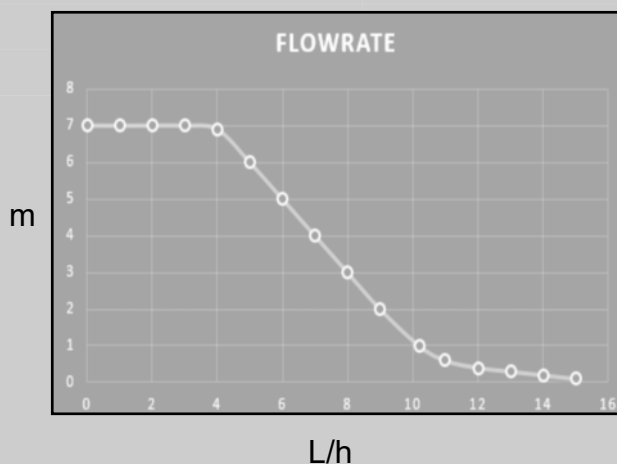

## Recommended Accessory

Connection extension kit

The Connection Extension Kit allows you to move the condensate pump from the trunking and into the

Ref- GC1KCTC710




## Flowatch Silence DT20 Design

A complete kit, with quality trunking and all accessories needed for installation.  
For air conditioners upto 20kW/68000BTU.  
Ref: DE20PMCE450



### Technical Specification

Flowrate Max	20L/hr
Suction Head Max	3m
Discharge Head	10m
Electrical Power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NO-NC
Noise Level	✖
Protection Rating	IP24
Operating Cycle	100%
Power/Alarm Cable	1.6m
Dimensions	168x37x40mm / 75x36x38mm

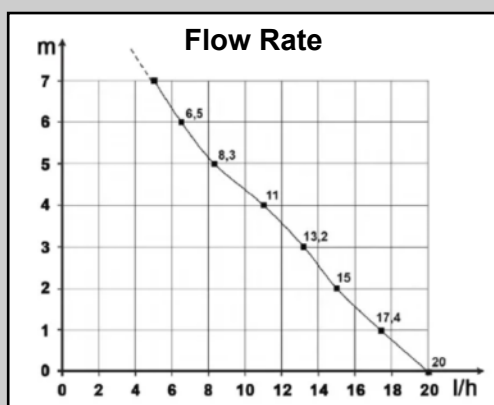

### Benefits

#### Extreme Silence



An unrivalled user experience.  
No disturbance, even in the bedroom.

#### Flowatch Silence DT20 included



Quite Simply, the new standard on the market.

#### New technology

DT20  
TECHNO

Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!

#### Very low power consumption

3W

Only 3W power consumption, during operation only!

#### Custom-made pump casing



For easy installation and perfect integration into the trunking.

#### New Trunking



A market-standard trunking system that's aesthetically pleasing, easy to install and comes with a wide range of accessories.

#### Stop siphoning included



Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

### Contents

Trunking with elbow - finishing gasket - finishing ceiling plate - pump in absorber - stop siphoning  
- reservoir with air-vent tube - power/alarm cable - inlet tube - suction tube 0.25m - screws and rawlplugs



# Flowatch Vision

The only monoblock wall pump on the market, installed horizontally or vertically. For the condensate removal of air conditioners up to 10kW/36000BTU.

Ref: DE05LCF300



## Technical Specification

Flowrate Max	15L/hr
Discharge Head	10m
Electrical Power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise Level	
Protection Rating	IP64
Thermal Protection	Yes
Operating Cycle	100%
Power/Alarm Cable	1.6m
Dimensions	800x80x55mm

## Benefits

### 4 Possible Installations

**World first** - Can be installed horizontally or vertically, on the right or on the left of the air conditioner.

### Easy Maintenance

Access to the pump elements (reservoir, tubes etc.) is made by removing the cover.

### Very Silent


Very silent pump, suitable for an installation in any room.

### Record Size

Thanks to its small size, the FLOWATCH® VISION is the most discreet and aesthetic monoblock wall pump of the market.

### Reservoir With Removing Filter

Prevents dust and particles to damage the pump, easy to clean.

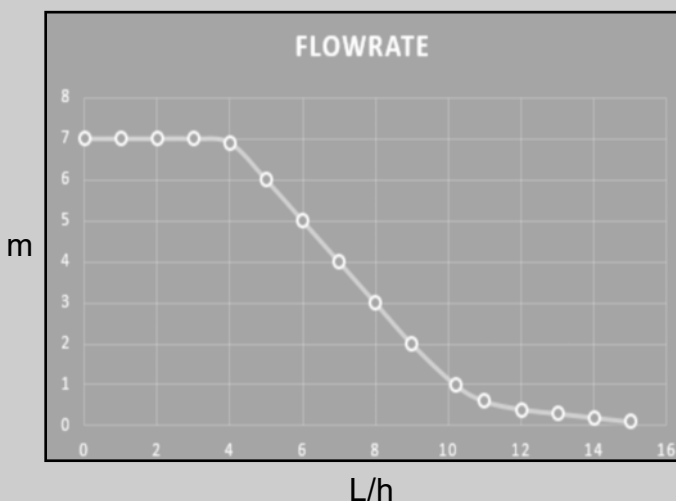

## Centrifugal Pump CP08

Universal centrifugal pump dedicated to split cassettes.

Ref: CP08SC6641




### Technical Specifications

Flowrate Max	60L/Hr
Discharge Head	110cm
Electrical Power	8W
Voltage	220-240V 50/60Hz
Noise Level	
Production Head	IP54
Temperature Rise	66K
Operating Ccle	100%
Outlet Tube	OD14mm
Dimensions	82.5x76x97.3mm

### Universal Plate

The CP08 mounting plate has been designed to fit the majority of cassette air conditioners on the market.

It can therefore easily replace another model of centrifugal pump at a cheaper price!

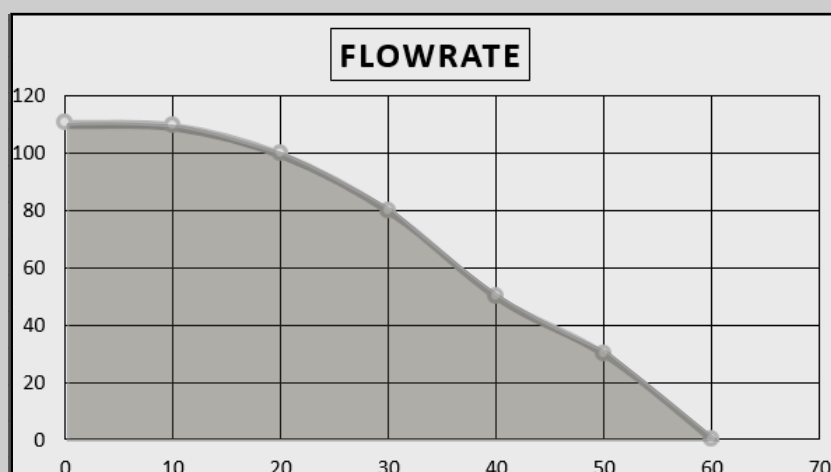

# Flowita Evo

Wall-mounted monobloc pump, dismountable, for the condensate removal from air conditioners up to 10kW / 36000BTU.

Ref: DE05LCC440




## Technical Specification

Flowrate Max	13.2L/hr
Discharge Head	10m
Electrical Power	19W
Voltage	220-240V 50/60Hz
Alarm	Optional
Noise Level	
Protection Rating	IP24
Thermal Protection	Yes
Operating Cycle	100%
Power/Alarm Cable	0.8m
Tank Capacity	170ml
Dimensions	135x57x106.5mm

## Benefits

### Dismountable



**The FLOWITA EVO** can be Disassembled in seconds. Front panel, tank, suction tube... all the elements are removable.

Installation and maintenance has never been so quick and easy!



### 100ml Pumping Cycles

Its large reservoir allows the pump to operate optimally: larger and less frequent pumping cycles.



### Extremely Silent

The most discreet wall-mounted pump on the market!




**The FLOWITA EVO** can be installed easily and quickly underneath any air conditioner.



### IP64 Protection

Protected against water

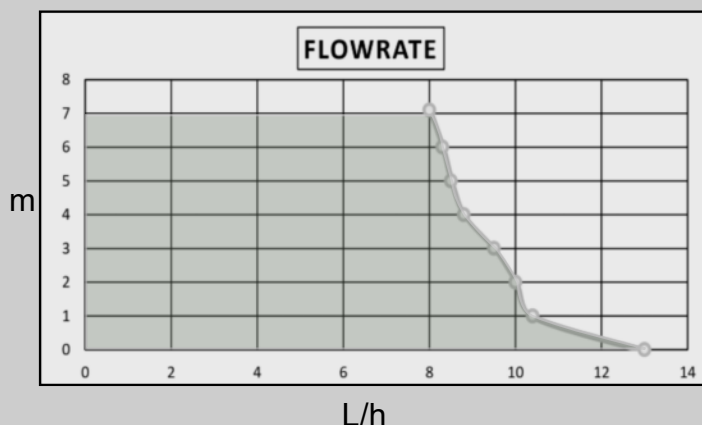

# EcoTank+ 1.2 / 2.5L

Centrifugal tank pump for the removal of condensates from air conditioners, refrigerated displays or gas condensing boilers.

Ref ECOTANK+ 1.2 50Hz: DE12QCC610

Ref ECOTANK+ 2.5 50Hz: DE25QCC620




pH > 2.5



## Technical Specification

Flowrate Max	800L/hr
Discharge Head	5.6m
pH Tolerated	pH > 2.5
Condensates Max Temp	60°C
Electrical Power	65W
Voltage	230V - 50Hz
Alarm	NO-NC
Noise Level	
Protection Rating	IP24
Thermal Protection	Yes
Operating Cycle	30%
Power/Alarm Cable	1.5m
Tank Capacity	170ml
Dimensions ECOTANK+ 1.2L	280x130x129mm
Dimensions ECOTANK+ 2.5L	280x130x159mm

## FLOWRATE

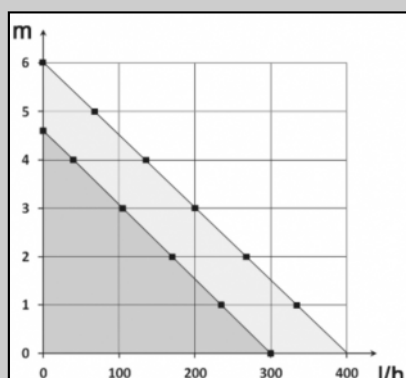

## Benefits



### IP64 Protection

The pump is protected against water splashes.




### Universal Electric Plug

Power/alarm cable can be taken off, making easy installation and maintenance.



### Outlet for 6/9 or 9/12mm tube

Thanks to it's connector supplied, the discharge can be made with a 6/9mm or a 9/12mm tube.



### High Capacity Tank

Thanks to it's 2.5 l tank, the ECOTANK+ 2.5 reduces the number of pumping cycles and answers to a great deal of applications.



### Compact Tank Pump

With only 129mm height, the ECOTANK+ 1.2 fits easily in any space.



### Reversible Tank

Turning the tank allows to fit in any configuration.



### PVC Clear Tube Included (Only in 60HZ version)

A 6m discharge tube (10x13mm diameter) is included in the ECOTANK+ 2.5 60Hz version.

# Sunny Flowatch Duo

Mini Tank pump (solenoid) for the condensate removal of gas condensing boilers up to 60Kw/ 200000BTU.

Ref: DE05NCC090



## Technical Specification


Flowrate Max	19L/hr
Discharge Head	10m
pH Tolerated	pH > 2.5
Electrical Power	19W
Voltage	220-240V - 50/60Hz
Alarm	NO-NC
Noise Level	20.2dBa
Protection Rating	IPX4
Thermal Protection	OUI
Operating Cycle	100%
Power/Alarm Cable	1.5m / 1.3m
Dimensions	186x110x100mm

## Benefits



### 20.2 dBA

Very silent pump, suitable for an installation in any room.



### Compact Tank Pump

The SUNNY FLOWATCH® DUO offers the best tank capacity/pump size of the market.



### IPX4 Protection

Protected against water splashes.



### Removable integrated filter

Prevent dust and particles to damage the pump. Easy to remove and to clean.




### Mounting brackets

Thanks to its mounting brackets (and screws and rawlplugs supplied), pump can be easily fixed to the wall.



### Inlet adapter included

This adapter allows condensate to enter the pump via tubes of different diameters.

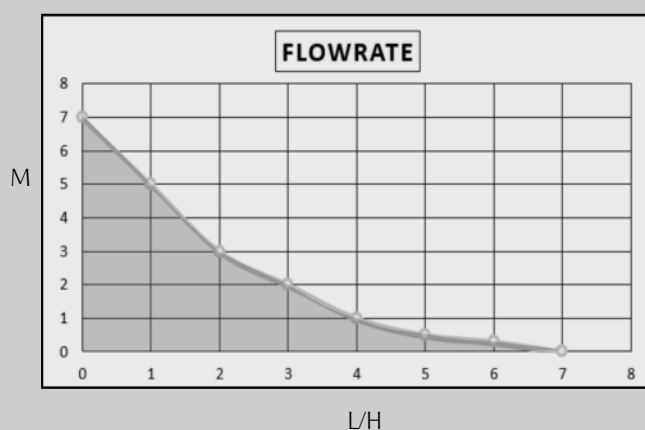

# 1.8L Tank Pump

1.8L low profile tank pump.

Ref: PC3208



**Plug & Play**

## Technical Specification

Max lift	Max 6m
Discharge Size	Max 320L/ph
PSI	8.7 psi
Watts	20W
IP Rating	IPX4
Amps	0.18A - 0.39A
Volts	100-230V
Hz	50-60Hz
High Level Alarm	Yes
Product Weight (Empty)	0.91kg
Power Cable Length	1.3m
Alarm Cable Length	1.3m
On Level	45mm
Off Level	30mm
Noise Level dBa	28dBa

# 1.8L High Lift Tank Pump


1.8L Tank Pump 12m  
Ref: P580



Plug & Play

## Technical Specification

Max Flow	580L/Hr
Discharge Head	12cm
Watts	90W
Amps	0.18A
Volts	230V
Hz	50Hz
High Level Alarm	Yes
Power Cable	1m Plug & Play
Noise Level dBa	60dBa at 1m
Tank Capacity	1.8L
Hose Connection	1/4" / 3/8"

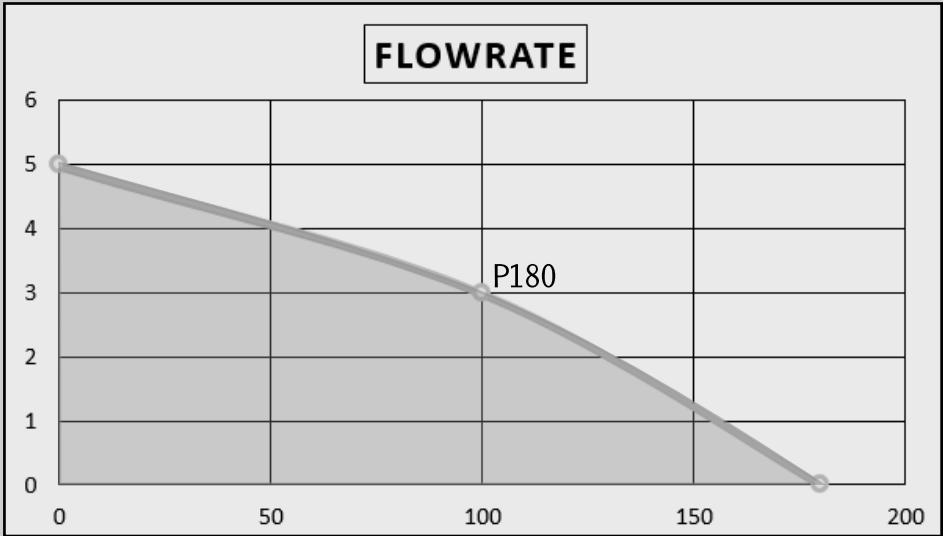

1.8L High Lift Tank Pump



# Dairy Cabinet Pump

The P120S is specially designed to handle condensate from supermarket refrigerated display cabinets, it is extremely easy to install and maintain.

The compact design of the pump facilitates installation under low-slung display cabinets and it removes water during the defrost cycle.

Including a easy clean stainless steel tank, which can handle the 70 degrees hot water, non return valve 2 inlets for optional (top or side). Effectively pumps away defrost water and filters debris.

Ref: P120S



## Technical Specification

Tank Capacity	3.0ltr
Sound Level at 1mtr	40-68 dBa
Power Consumption	30W
Voltage	230V/50-60Hz
Discharge Head	30m
Flowate	380 L/ph
Dimensions	70x463x286mm
Water Temp	75°C
Case	Stainless Steel

# Braided Hose

Commonly used in air, water and liquid transfer applications, braided hoses are a popular choice due to their increased durability, kink resistance and pressure ratings over un-braided variants.




	I/D	O/D	Pressure in working bar	Pressure in burst bar	Min bend rad	Min temp	Max temp
1/4" x 30m Clear braided	6mm	10mm	7mm	21	30°	-15°C	+60°C
1/4" x 30m Black braided	6mm	10mm	7mm	21	30°	-15°C	+60°C
3/8" x 30m Clear braided	10mm	14mm	8mm	24	30°	-15°C	+60°C
3/8" x 30m Black braided	10mm	14mm	8mm	24	30°	-15°C	+60°C
1/2" x 30m Clear braided	12mm	16mm	6mm	18	30°	-15°C	+60°C

# Strut*Fast* Trunking

**Strut*Fast*** brand new trunking is now in stock and available in 3 different sizes; 80x60, 100x60 & 140x90 with accessories available for each size. The trunking is available black, grey, white & brown from stock.

We manufacture all of this in house so bespoke colours are available upon request with a MOQ.

Manufactured by **Strut*Foot***.

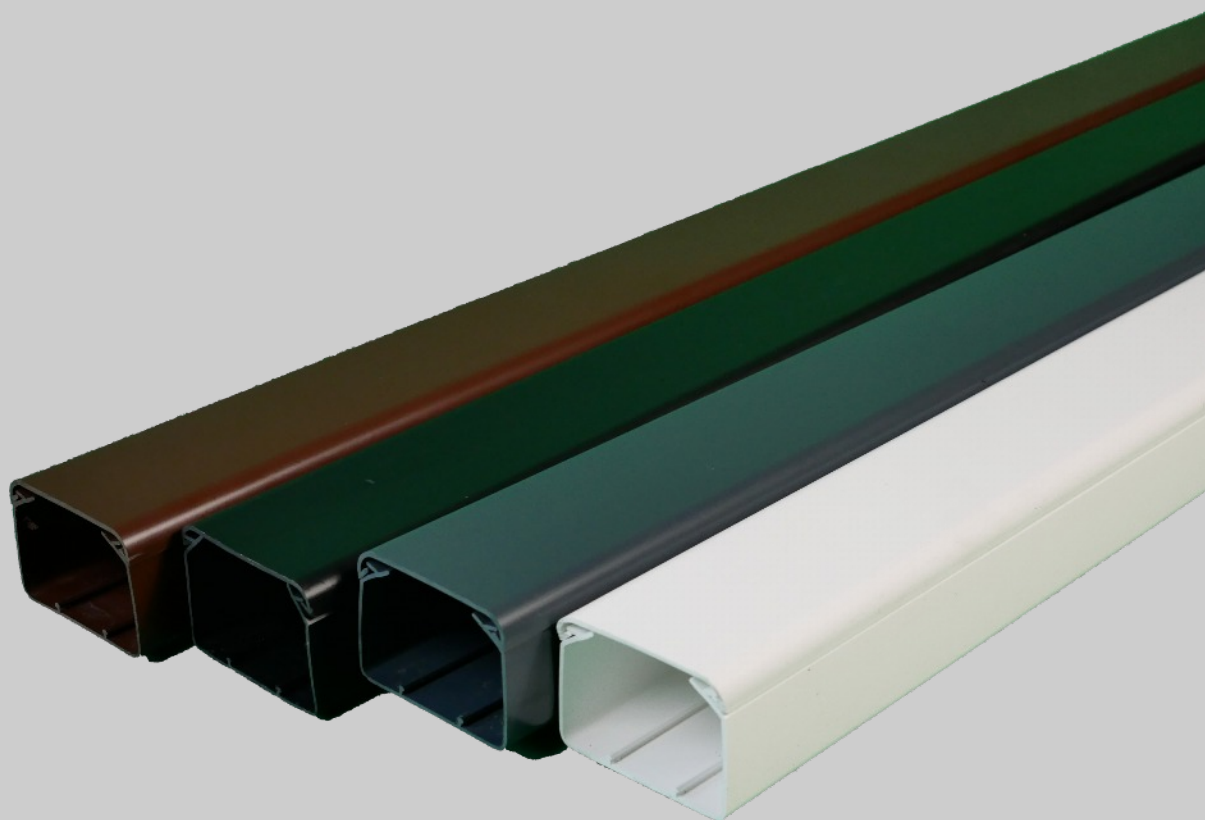

## White

Part No	Trunking	Length
SDT-80	80x60	2m
SDT-100	100x60	2m
SDT-140	140x90	2m

## Black

Part No	Trunking	Length
SDT-80B	80x60	2m
SDT-100B	100x60	2m
SDT-140B	140x90	2m

## Brown

Part No	Trunking	Length
SDT-80BR	80x60	2m
SDT-100BR	100x60	2m
SDT-140BR	140x90	2m

## Anthracite Grey

Part No	Trunking	Length
SDT-80G	80x60	2m
SDT-100G	100x60	2m
SDT-140G	140x90	2m

**90° Bend**



**Boxing Glove**



**Coupler**



**Internal Bend**



**Tee**



**External Bend**



**80x60**

**100x60**


**140x90**

Part No	Description
EB-80	External Bend
IB-80	Internal Bend
SFC-80	Coupler
VE-80	90° Bend
SFT-80	Tee
WI-80	Boxing Glove

Part No	Description
ED-100	External Bend
IB-100	Internal Bend
SFC-100	Coupler
VE-100	90° Bend
SFT-100	Tee
WI-100	Boxing Glove

Part No	Description
ED-140	External Bend
IB-140	Internal Bend
SFC-140	Coupler
VE-140	90° Bend
SFT-140	Tee
WI-140	Boxing Glove

# *The Perfect Partnership*

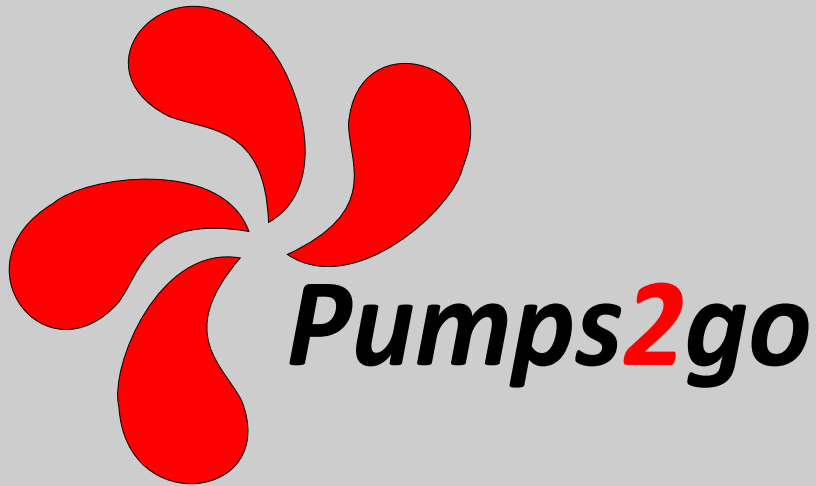

**SICCOM**

**WIPCOOL®**

**StrutFast**

**Pumps2go** Ltd, Units 5-6 Grain Warehouse, Derby Street, Burton-on-trent, DE14 2JJ



+44 (0)1283 512513



info@pumps2go.co.uk



www.pumps2go.co.uk